

**Cleaning and Conservation**  
**Automotive**  
**Food industry**  
**Industrial Maintenance**



## ACTIV 1000

AQUEOUS, SUPERCONCENTRATED,  
UNIVERSAL DEGREASER

### Properties

Superior degreaser, concentrated, extremely effective in removing animal, vegetable and mineral fats.

Its composition, with new surfactants, replaces aggressive solvents and offers a versatility of applications.

### Recommended Use

#### Automotive

Engines and chassis, metal parts, installations, equipment and tools in general.

#### Food industry

General use in industrial kitchens and factories. Equipment and machinery, utensils, work tables, floors and walls.


#### Industrial Maintenance


Facilities and equipment in general.

### Packing (lt)

5 – 30 – 210 – 1000

### DILUTION

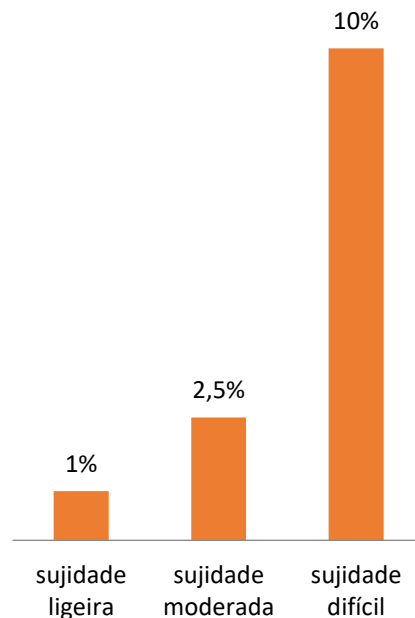

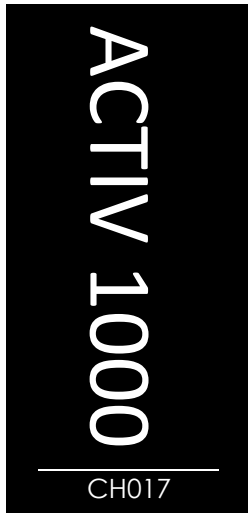

**Cleaning and Conservation**  
**Automotive**  
**Food industry**  
**Industrial Maintenance**



TECHNOLOGY / ADVANTAGES

- Solvent-free
- Safe in metals, glass, plastic and rubber
- Concentrate, soluble in water
- Biodegradable
- Non-flammable
- Does not contain VOCs
- Does not contain EDTA or NTA

**Physico-chemical characteristics**

|                        |                    |
|------------------------|--------------------|
| <b>Physical State:</b> | Green Liquid       |
| <b>Odour:</b>          | Distinctive        |
| <b>pH:</b>             | 13 ± 0.5           |
| <b>Density at 20°:</b> | 1,01 – 1,05 (kg/L) |
| <b>Surfactants:</b>    | >= 15%             |

The data described above correspond to typical values and should not be considered as a specification.

APPLICATION

**Preparation**

1. Dilute only with water. Gently shake the solution. The dilution must be suitable for the work to be carried out: for light dirt, one hundred (100) parts of water for one (1) of product; for moderate dirt, forty (40) parts of water for one (1) of product; for difficult dirt, ten (10) parts of water for one (1) of product.

**Application**

1. Test previously in a small area to measure the desired concentration, yield, application technique and compatibility with the materials.  
 2. Apply with a low pressure sprayer for alkalis. Allow the solution to act/wet the surfaces for two (2) to ten (10) minutes. If necessary, apply mechanical action with an appropriate brush, or perform rinsing (mandatory) with pressurized water. If necessary, repeat the process.

**Cleaning**

Clean the containers and utensils with water. For instructions on waste disposal, see section 13 of the Safety Data Sheet.

**Compatibility with Materials**


It is compatible with most metals, plastics, rubbers, glass and other materials.

Important:

It is not suitable for copper alloys or light alloys such as aluminum. It is recommended to test individually on the materials before prolonged use.

Do not apply to painted surfaces without prior testing.

HANDLING

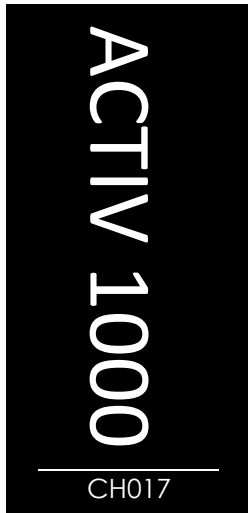

**Cleaning and Conservation**  
**Automotive**  
**Food industry**  
**Industrial Maintenance**



### Storage

Store in the original container, tightly closed and in a cool place. Keep locked out of reach of children.

### Safety Precautions

Do not mix with other products. In case of contact with the eyes, wash immediately with running water and consult a doctor. Wear proper gloves and eye/face protection.

### Attention

- Proper use is the responsibility of the applicator.
- Make sure you are using the most current versions of the Datasheet and Safety Data Sheet.
- For professional use only. Keep away from children.

**Chemzy Portugal Lda.**  
Jardia Business Park - BL  
2870-607 Montijo

[www.chemzy.pt](http://www.chemzy.pt)

**Customer Service and Technical Support**  
212 313 516

### Warranty

The indications given on our labels, information, data sheets or manuals are the result of laboratory tests, or field applications, which have proved to be predominantly significant under normal conditions of application. The results obtained under these conditions have enabled us to define general recommendations, which should be adapted to particular cases. Our responsibility is expressly limited to the supply of carefully controlled products and their proper application when under our control.

The ordering and receipt of the products, implies the acceptance of the guarantee in the terms indicated above, even when the purchase order, or purchase order, does not specify it, or indicates otherwise.

No representative is authorized to assume an additional warranty on our behalf following the sale of our products. Chemicals can cause serious injury. Before use, the Safety Data Sheet should be consulted and its instructions should be followed to prevent accidents at work.

The buyer must determine the suitability of the product for the purpose for which it is intended, assuming the duty to verify all factors involving its application, such as the characteristics and finish of the materials/surfaces to be treated, environmental conditions, professionalism of the applicator, etc.

It is always recommended to carry out a preliminary test on the surface to be treated. We assume no responsibility for the incorrect use of our products.

**For professional use only.**  
Last revised 09/20